


# 7806

## 3-terminal 1 A positive voltage regulator

### Features

- Output Current up to 1 A
- Thermal Overload Protection
- Short Circuit Protection
- Output Transistor Safe Operating Area Protection

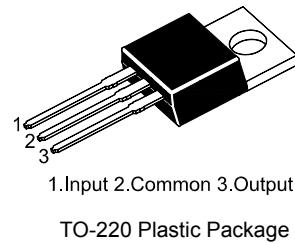

### Absolute Maximum Ratings ( $T_a = 25^\circ\text{C}$ )


Parameter	Symbol	Value	Units
Input Voltage	$V_I$	35	V
Thermal Resistance Junction-Cases	$R_{\theta JC}$	5	$^\circ\text{C}/\text{W}$
Thermal Resistance Junction-Air	$R_{\theta JA}$	65	$^\circ\text{C}/\text{W}$
Operating Temperature Range	$T_{Opr}$	0 to + 125	$^\circ\text{C}$
Storage Temperature Range	$T_{stg}$	- 65 to + 150	$^\circ\text{C}$

### Electrical Characteristics

( $0^\circ\text{C} < T_J < 125^\circ\text{C}$ ,  $I_O = 500 \text{ mA}$ ,  $V_I = 11 \text{ V}$ ,  $C_I = 0.33 \mu\text{F}$ ,  $C_O = 0.1 \mu\text{F}$ , unless otherwise specified)

Parameter	Symbol	Conditions		Min.	Typ.	Max.	Unit
Output Voltage	$V_O$	$T_J = + 25^\circ\text{C}$		5.75	6	6.25	V
		$5 \text{ mA} \leq I_O \leq 1 \text{ A}$ , $P_O \leq 15 \text{ W}$		5.7	6	6.3	
		$V_I = 8 \text{ V to } 21 \text{ V}$					
Line Regulation <sup>1)</sup>	Regline	$T_J = + 25^\circ\text{C}$	$V_I = 8 \text{ V to } 25 \text{ V}$	-	-	120	mV
			$V_I = 9 \text{ V to } 13 \text{ V}$	-	-	60	
Load Regulation <sup>1)</sup>	Regload	$T_J = + 25^\circ\text{C}$	$I_O = 5 \text{ mA to } 1.5 \text{ A}$	-	-	120	mV
			$I_O = 250 \text{ mA to } 750 \text{ mA}$	-	-	60	
Quiescent Current	$I_Q$	$T_J = + 25^\circ\text{C}$		-	-	8	mA
Quiescent Current Change	$\Delta I_Q$	$I_O = 5 \text{ mA to } 1 \text{ A}$		-	-	0.5	mA
		$V_I = 8 \text{ V to } 25 \text{ V}$		-	-	1.3	
Output Voltage Drift	$\Delta V_O/\Delta T$	$I_O = 5 \text{ mA}$		-	-0.8	-	mV/ $^\circ\text{C}$
Output Noise Voltage	$V_N$	$f = 10 \text{ Hz to } 100 \text{ KHz}$ , $T_A = + 25^\circ\text{C}$		-	45	-	$\mu\text{V}$
Ripple Rejection	RR	$f = 120 \text{ Hz}$ , $V_O = 9 \text{ V to } 19 \text{ V}$		59	-	-	dB
Dropout Voltage	$V_{Drop}$	$I_O = 1 \text{ A}$ , $T_J = + 25^\circ\text{C}$		-	2	-	V
Output Resistance	$R_O$	$f = 1 \text{ KHz}$		-	19	-	$\text{m}\Omega$
Short Circuit Current	$I_{SC}$	$V_I = 35 \text{ V}$ , $T_A = + 25^\circ\text{C}$		-	250	-	mA
Peak Current	$I_{PK}$	$T_J = + 25^\circ\text{C}$		-	2.2	-	A

<sup>1)</sup> Load and line regulation are specified at constant junction temperature. Changes in  $V_O$  due to heating effects must be taken into account separately. Pulse testing with low duty is used.



**SEMTECH ELECTRONICS LTD.**



## Typical Performance Characteristics

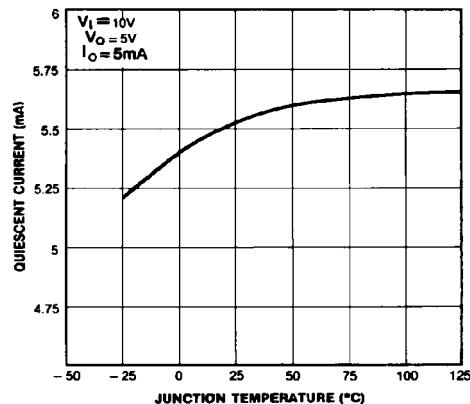


Figure 1. Quiescent Current

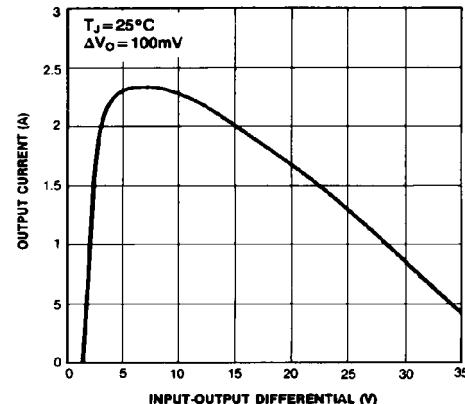


Figure 2. Peak Output Current

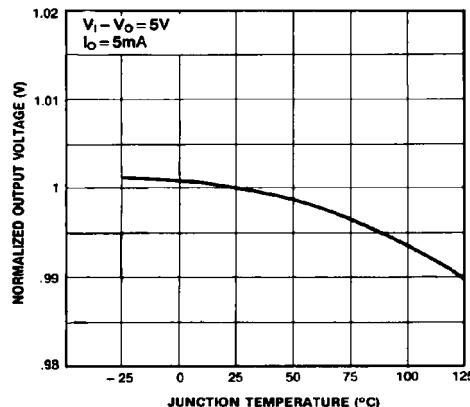


Figure 3. Output Voltage



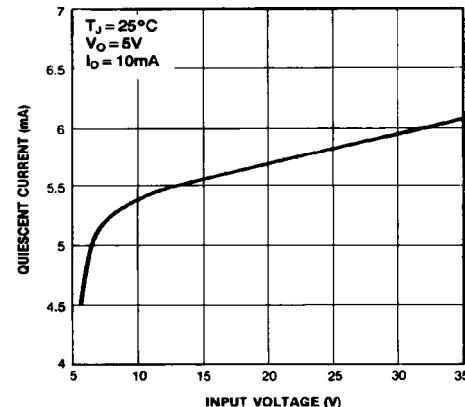


Figure 4. Quiescent Current




**SEMTECH ELECTRONICS LTD.**

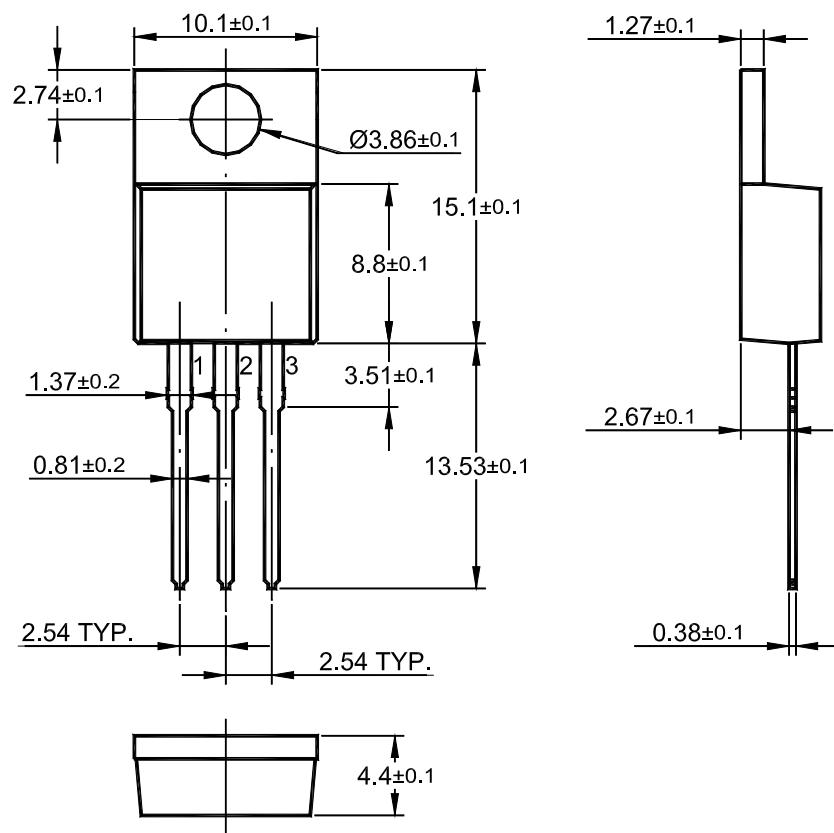

**TO-220 PACKAGE OUTLINE**

Dimensions in mm

**SEMTECH ELECTRONICS LTD.**

Dated : 17/09/2016 Rev:01